

Capp Rondo

HOTPLATE STIRRER

The **Capp Rondo Hotplate Stirrer** offers three heating modes: rapid, gradual and accurate heating. It operates with heating temperatures ranging from ambient to 550°C.

Its plate surface is made of robust nano-crystalline glass ceramic and ensures full resistance towards liquid splash or temperature shocks.

The **Capp Rondo Hotplate Stirrer** operates at a variable speed ranging from 200 to 2.200 RPM. The speed can be set up in intervals of 10 RPM and the time can be programmed from 1 to 999 minutes, or continuous, infinite operation.


The motor technology of the **Capp Rondo Hotplate Stirrer** ensures constant speed under varying load weight.

The large user-friendly display provides an overview of all parameters and enables easy and comfortable operation.

With the **Capp Rondo Hotplate Stirrer** the user can program up to 99 individual protocols as well as set up the programmable Pulse Mode from 30 to 99 seconds.

Specifications:

Speed Range	200-2.200 RPM in steps of 10 RPM
Temperature Range	From ambient to 550°C
Motor Type	Brushless DC motor
Top Plate Material	Nano-crystalline glass ceramic
Top Plate Dimensions	180x180mm
Time Setting	1-999 minutes or infinite
Programmable Modes	Up to 99 individual protocols
Pulse Mode	Programmable, from 30 to 99 secs.
Dimensions (WxDxH)	220x330x115mm
Weight	4.5kg
Protection Class	IP 21

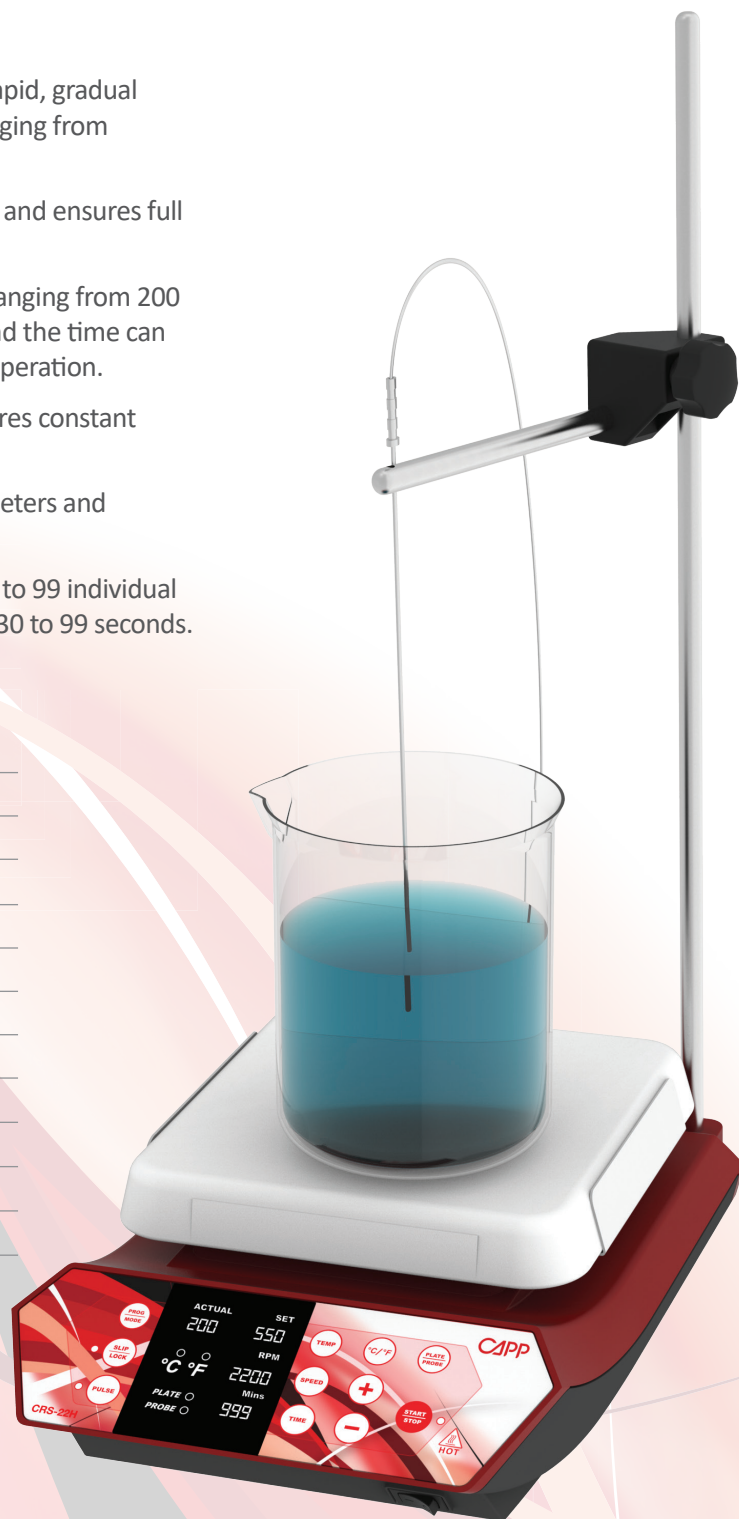

Ordering Information

Cat No.	Description
CRS-22H	CappRondo Hotplate Stirrer 2.200 RPM, 550°C ceramic, 20L capacity, 220V
CRS-22H-110	CappRondo Hotplate Stirrer 2.200 RPM, 550°C ceramic, 20L capacity, 110V
CRS-22H-P	P1000 temperature probe for CappRondo Hotplate Stirrer
CRS-22H-S	Stand for P1000 temperature probe CappRondo Hotplate Stirrer